




Duro Ecomatic



Model shown with option

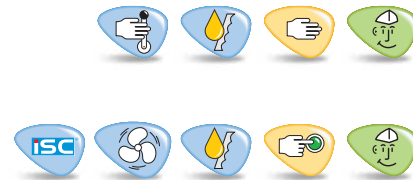

Duro



Ecomatic

The classic with a well-established name

Small-scale bakeries' first choice of traditional bread slicers. Whether semi-automatic (Duro) or fully automatic (Ecomatic equipped with the ISC system as standard), the reliability of those bread slicers will amaze you.


Stainless steel cover option. On the Ecomatic, the opening and closing system for the stainless steel cover is manual. On the Duro, the cover is activated by a lever.



When not fitted with the stainless steel cover option, the Ecomatic features a safety guard and a "continuous slicing" function, which allow the production to be sliced up for its delivery without having to reset between each slicing operation.




As an optional feature, the largest models (520 and 600) can be supplied in a "double slicing" version, where one half of the slicing width is used for thin slicing, and the other for thick slicing.

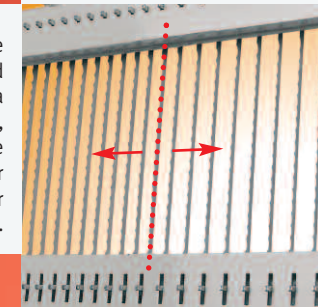

Raised shoe and high-strength caster with brake.

Dimensions (in mm)

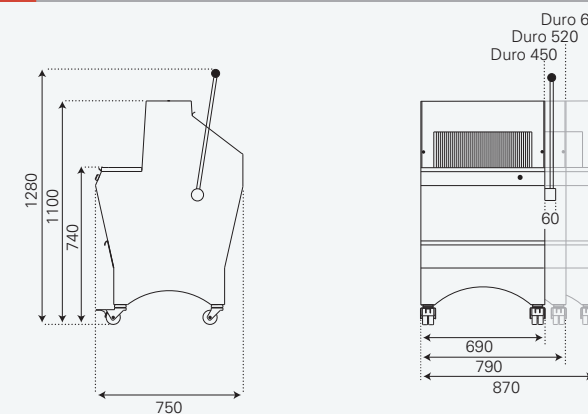

Technical specifications

Duro	450	520	600	450M
Features				
Max. loaf dimensions (L x w x h) (in cm)	44 x 31 x 16	52 x 31 x 16	60 x 31 x 16	44 x 30 x 16
Power output (in kW)	0,49	0,49	0,49	1,5
Net weight (in kg)	150	165	175	165
Choice of				
Slice thickness (in mm)	from 8 to 16	from 9 to 16	from 11 to 16	from 9 to 11
Loaf height	*idem	*idem	*idem	normal
Type of motor 400/230V	single- or 3-phase	single- or 3-phase	single- or 3-phase	3-phase
Options				
Height raised by 8 cm	•	•	•	•
Double slicing version (to be specified)		•	•	
Stainless steel cover	•	•	•	•

Ecomatic	450	520	600	450M
Features				
Max. loaf dimensions (L x w x h) (in cm)	44 x 31 x 16	52 x 31 x 16	60 x 31 x 16	44 x 30 x 16
Power output (in kW)	0,49	0,49	0,49	1,1
Net weight (in kg)	150	165	175	165
Choice of				
Slice thickness (in mm)	from 8 to 16	from 9 to 16	from 11 to 16	from 9 to 11
Loaf height	*idem	*idem	*idem	normal
Type of motor 400/230 V	single- or 3-phase	single- or 3-phase	single- or 3-phase	single- or 3-phase
Options				
Height raised by 8 cm	•	•	•	•
Double slicing version (to be specified)		•	•	
Bag opening blowing system (see page 25)	•	•	•	•
Stainless steel cover	•	•	•	•